




PRODUCT DIMENSIONS & SPECIFICATIONS

DS SERIES ALUMINUM DEDICATED HORIZONTAL COILS

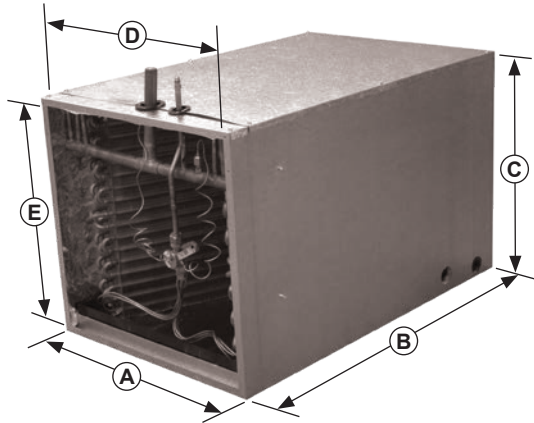

STANDARD SPECIFICATIONS

- Rifled aluminum tubing, enhanced aluminum fins.
- Air pressure tested at 500 psi, leak tested with helium, then sealed and nitrogen pressurized.
- Inlet and outlet dimensions are identical (without end caps).
- Externally mounted flowrate body with Schrader valve for hiss-testing or internally mounted factory-installed TXV.
- Refrigerant lines exit from the top of the coil.
- Split access doors on top of the coil for easy service (three-piece door option available).
- Embossed galvanized cabinets standard.
- Top, bottom, and side flanges for furnace connection.
- Fully insulated cabinets with faced insulation.
- Heavy duty plastic drain pan with four 3/4" FPT condensate drains (two per side).
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22 and R-410a when proper metering device is used.
- Ten-year limited warranty with registration.

Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

COIL MODEL	R410A PISTON SIZE	DIMENSIONS					SHIPPING INFORMATION			
		CABINET WIDTH [A]"	CABINET DEPTH [B]"	CABINET HEIGHT [C]"	INSIDE WIDTH [D]"	INSIDE HEIGHT [E]"	SHIPPING WEIGHT (LBS)			SKID QTY
							2 ROW	3 ROW	4 ROW	
DS24A*	0.055	19 1/2	31	15	18 1/4	14	23	29	-	16
DS24B*	0.055	19 1/2	31	19	18 1/4	18	25	33	-	16
DS24C*	0.055	19 1/2	31	23	18 1/4	22	31	40	-	16
DS24D*	0.055	19 1/2	31	19	18 1/4	18	36	46	-	16
DS30A*	0.059	19 1/2	31	15	18 1/4	14	26	34	-	16
DS30B*	0.059	19 1/2	31	19	18 1/4	18	25	33	-	16
DS30C*	0.059	19 1/2	31	23	18 1/4	22	31	40	-	16
DS30D*	0.059	19 1/2	31	19	18 1/4	18	36	46	-	16
DS36A*	0.068	19 1/2	31	15	18 1/4	14	29	38	-	16
DS36B*	0.068	19 1/2	31	19	18 1/4	18	29	38	-	16
DS36C*	0.068	19 1/2	31	23	18 1/4	22	31	40	-	12
DS36D*	0.068	19 1/2	31	19	18 1/4	18	51	65	-	16
DS42A*	0.074	19 1/2	31	19	18 1/4	18	34	43	-	16
DS42B*	0.074	19 1/2	31	23	18 1/4	22	36	46	-	12
DS42C*	0.074	19 1/2	31	25	18 1/4	24	34	43	-	12
DS42D*	0.074	19 1/2	31	23	18 1/4	22	46	57	-	12
DS48A*	0.080	19 1/2	31	23	18 1/4	22	41	53	-	12
DS48B*	0.080	19 1/2	31	25	18 1/4	24	39	51	-	12
DS48C*	0.080	19 1/2	31	25	18 1/4	24	51	65	84	12
DS48D*	0.080	19 1/2	31	23	18 1/4	22	49	64	-	12
DS60A*	0.089	19 1/2	31	23	18 1/4	22	67	86	-	12
DS60B*	0.089	19 1/2	31	25	18 1/4	24	68	86	-	12
DS60C*	0.089	19 1/2	31	25	18 1/4	24	71	90	-	12

Liquid line - 3/8" ODS, suction line - 3/4" ODS on 1-1/2-3 ton & 7/8" ODS on 3-1/2 - 5 ton.

Phone: 281.441.6500
Toll Free: 800.423.9007
Fax: 281.441.6510
www.aspenmfg.com



* For complete warranty details visit www.aspenmfg.com.

Revised 10/07/19. In keeping with its policy of continuous progress and product improvement, Aspen reserves the right to make changes without notice and incurring obligation. © 2019